









1、Accessories diagram




2、Calculation formula of installation size parameters:


door opening height=H, door opening width=B, door height=h, door width=b, door thickness=T, $h=H-68$, $b \geq 660$

Suitable for door thickness 30mm~60mm, Maximum load 80kg.

3、Install the accessories into the track in the order shown:

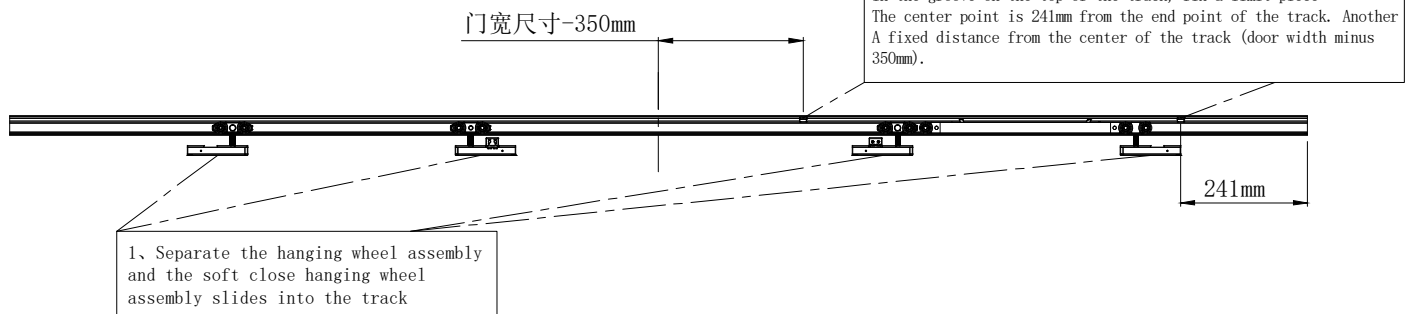

4、Fix the track on the top of the door frame as shown in the figure and fix the synchronous gear and connect the belts at both ends of the track:

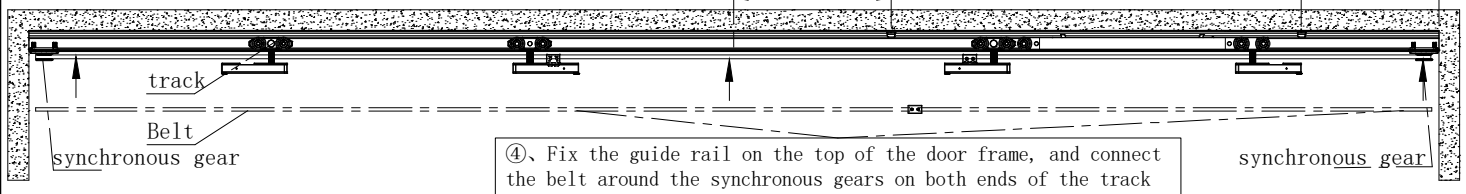

5、Install the lower guide wheel under the door frame respectively according to the figure, and then connect the A door leaf and B door leaf with the hanging wheel assembly and the soft close hanging wheel assembly:

