




1、Accessories

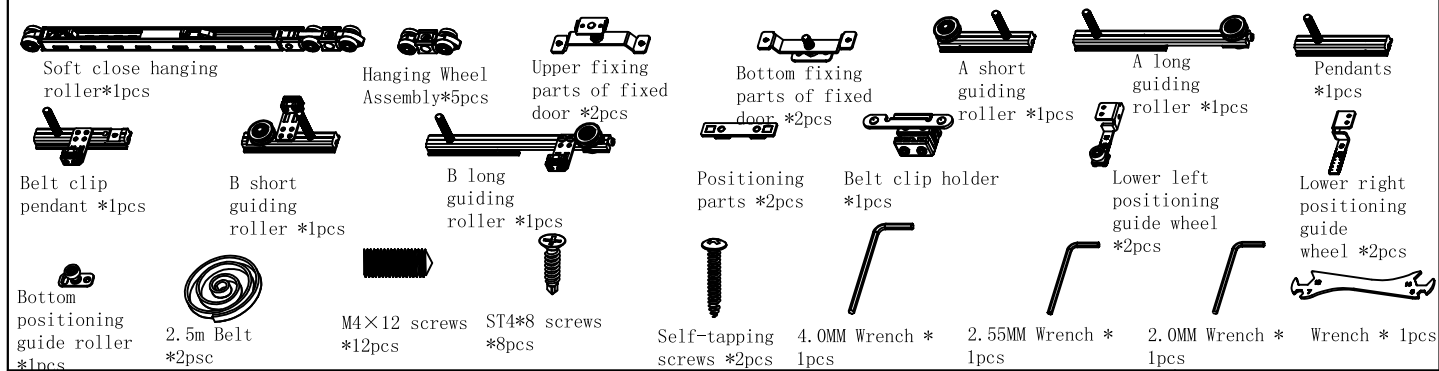


2、Installation dimension Door opening height=H , door height=h , door opening parameter calculation formula: width=W , door width=w
Door thickness=T , door height $h \leq H-80$, door width $w = (W+3 \times \text{overlap size } C) \div 4$
Adapt to door width: $w \geq 630\text{mm}$

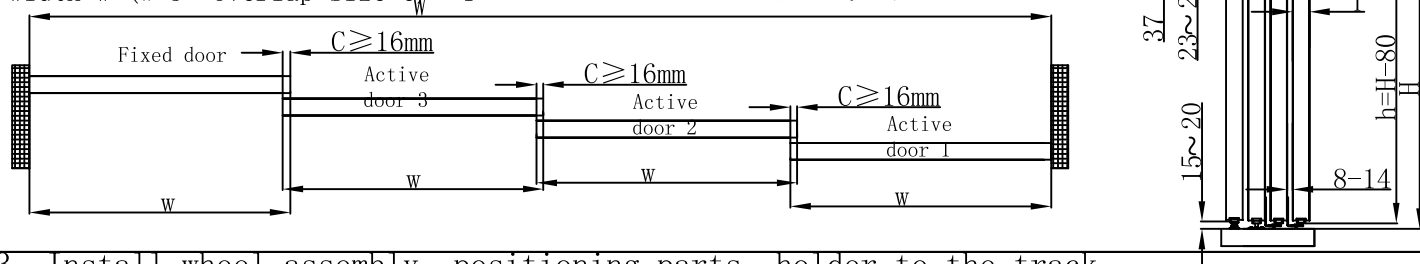


3、Install wheel assembly , positioning parts, holder to the track

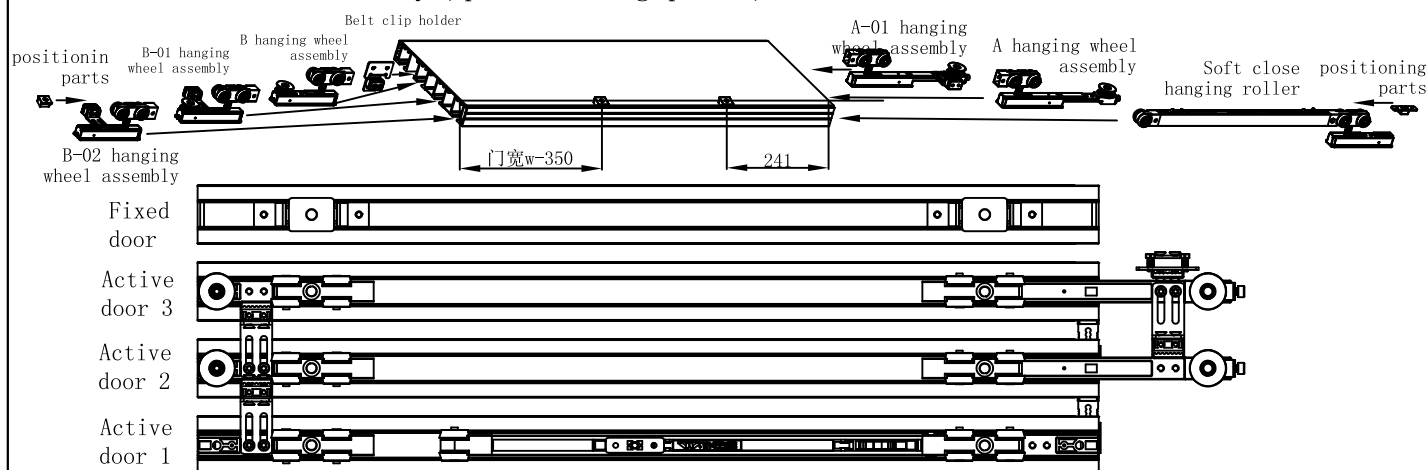


4、Install upper track and bottom positioning guide wheel

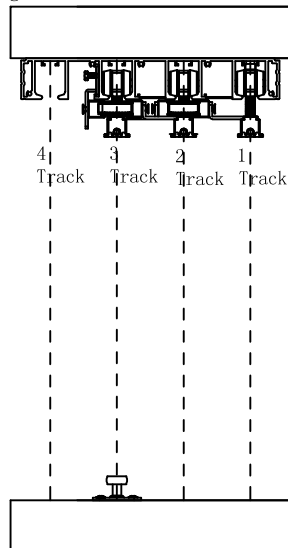



5、Install bottom positioning guide wheel of active door 2 and active door 3

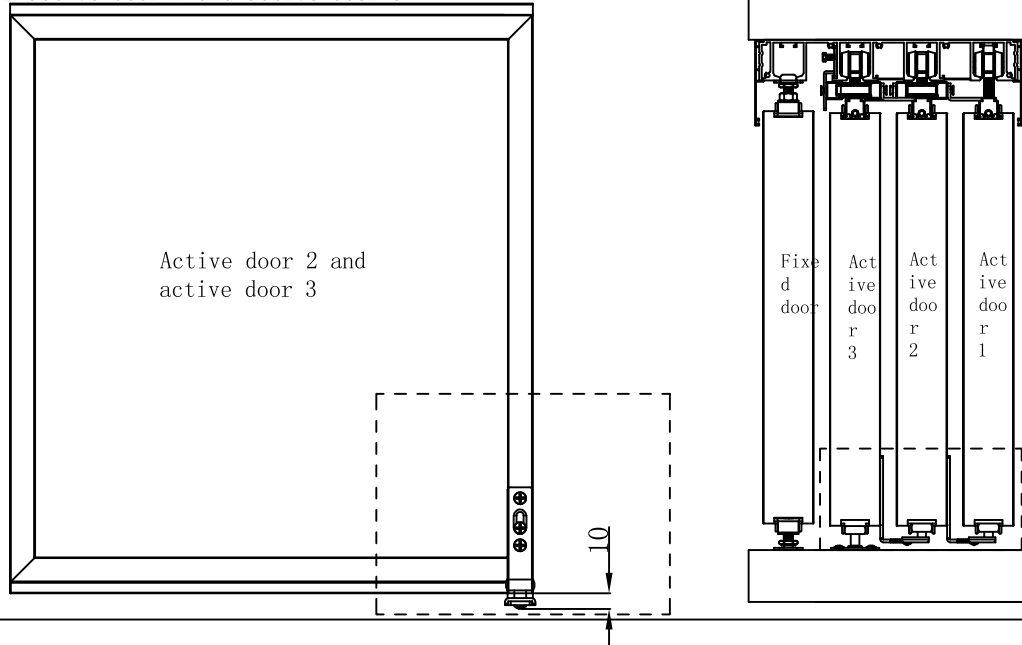


6、 Connect and lock the active door 3 ,active door 2 and the active door 1 with the pulley in sequence respectively

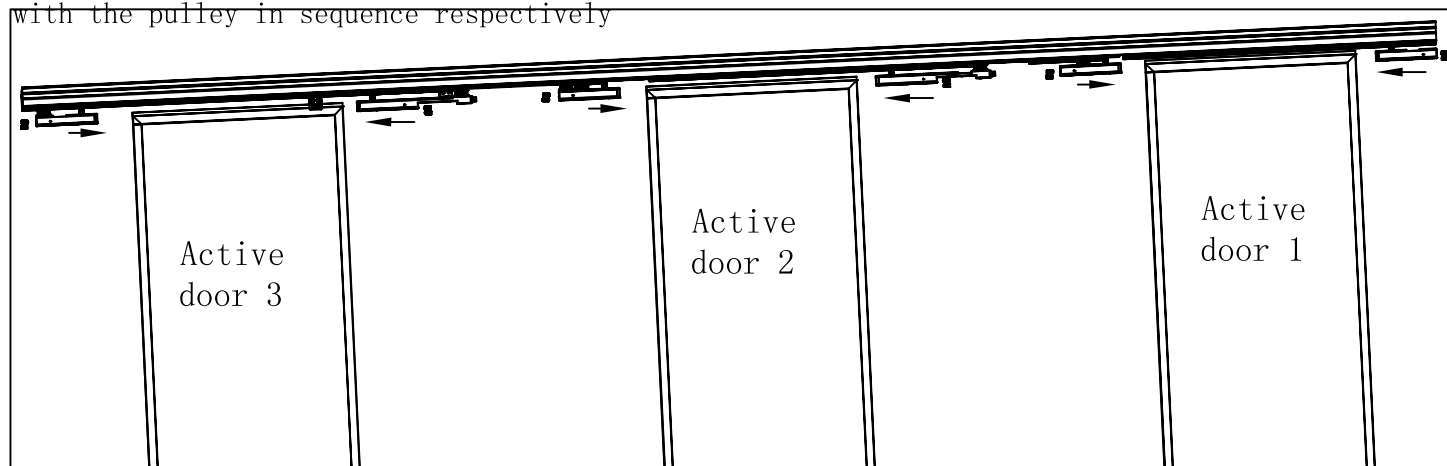


7、 Install synchronic belt ,connect belt with active door 3 and active 2 in sequence

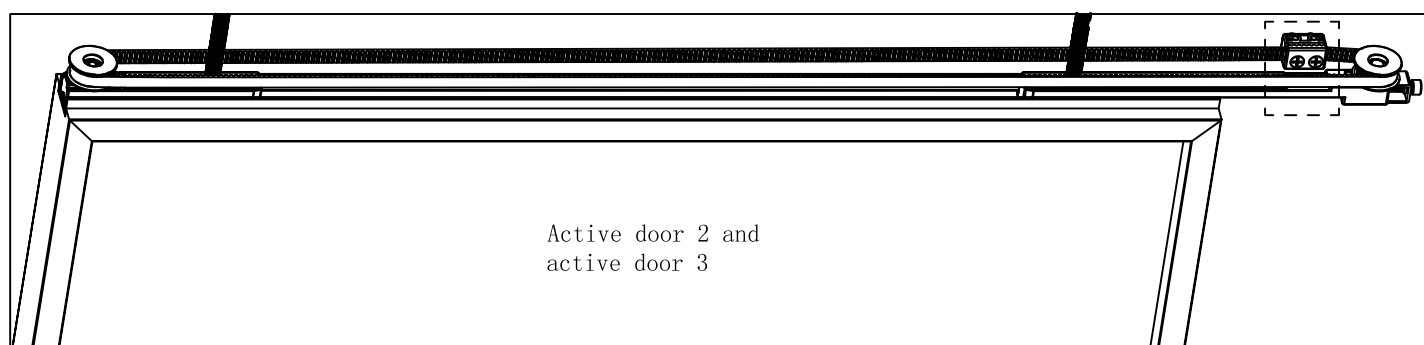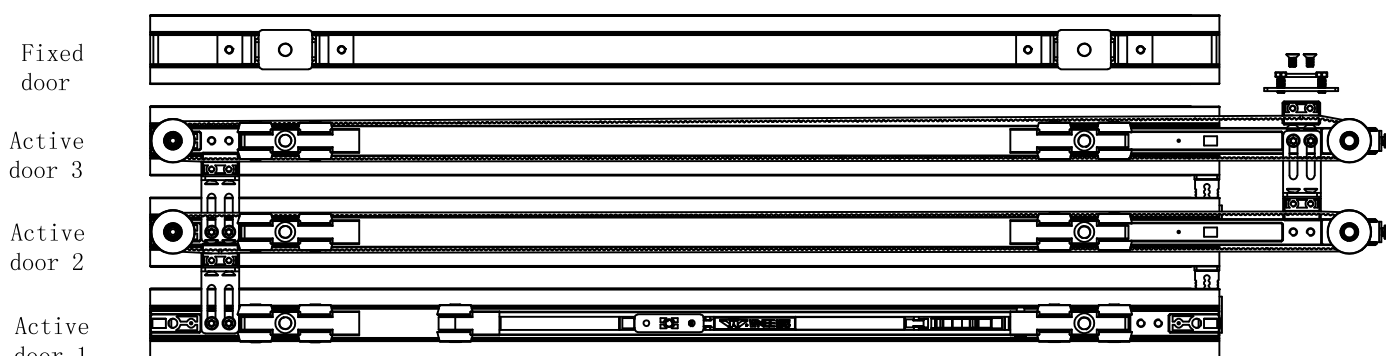


Connect Belt with active door 3, active door 2 and active door 1---

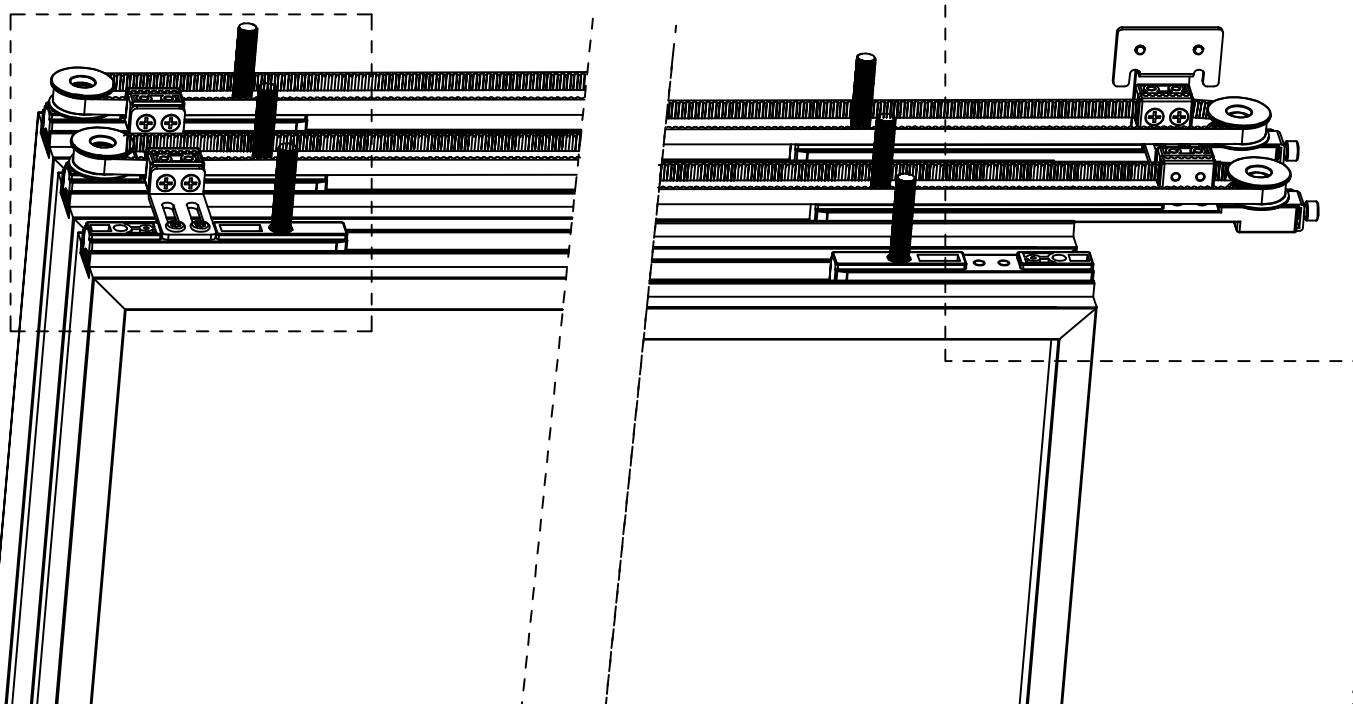


9、Fixing belt clip holder and adjust the synchronic effect of belt

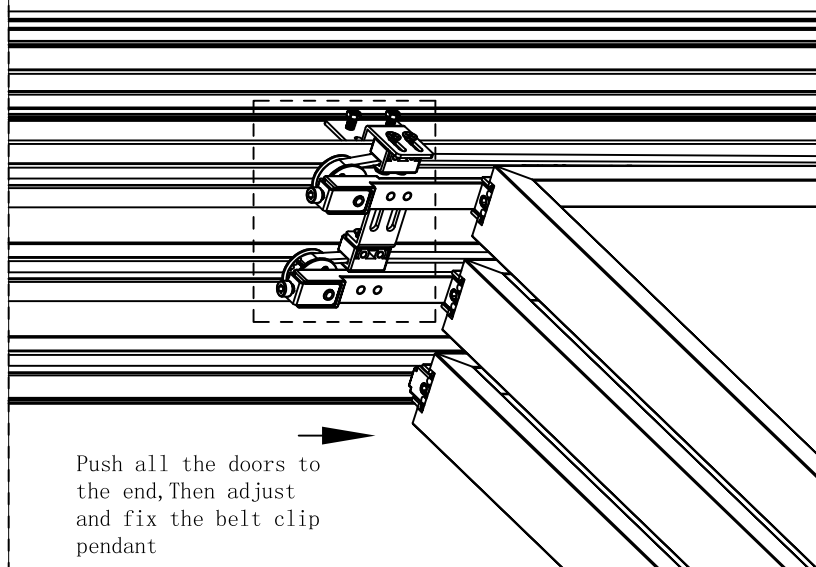


10、Install fixed door

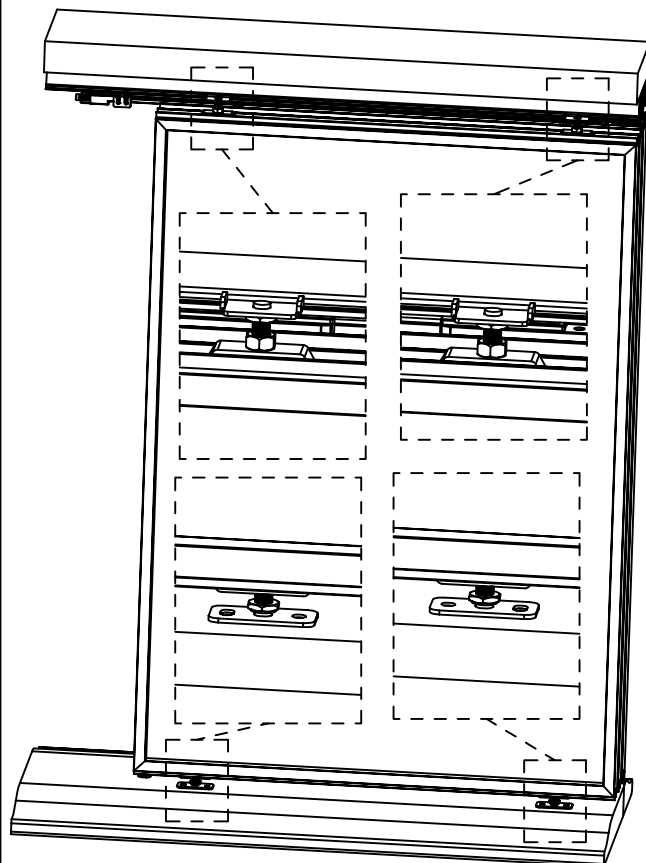

11、Install the four doors and adjust to be smoothly

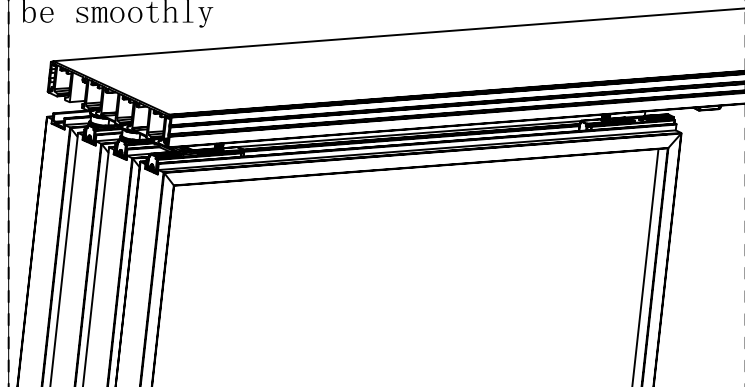

Install decorative cover

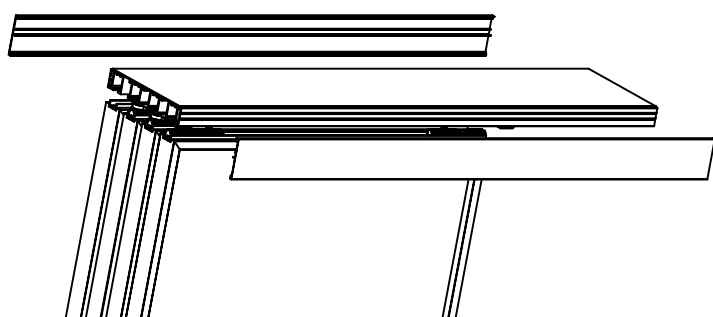

13、Final diagram after finishing installation:

